

 **PatchIM™**
LAMINATE WITHOUT LAMINATOR



DC-7600
Fast and reliable



HIGHLIGHTS AT A GLANCE:

- High resolution printing with 600 dpi
- High productivity due to high speed printing
- Over-the-Edge full card printing
- High capacity card feeder
- Variety of smart card encoders


DC-7600

Retransfer print technology is the next level of Direct-to-Card technology. First, the image is printed on a film, then the image is transferred from film to the card. This technique is suitable for edge-to-edge printing, heavy duty printing, improves reliability and thus suitable for a large variety of card types, such as:

- Travel ID cards
- Identity cards
- Student cards
- Entry permit cards
- High quality card applications
- Finance cards
- Resident cards
- Driving Licenses

TECHNICAL DATA

Print Method	Colour dye sublimation retransfer technology
Resolution	600 dpi
Print Capability	Single Side, Double Side, Over-the-Edge, photo quality image colour
Print Speed	Single Side: 25 sec. Double Side: 55 sec.
Interfaces	USB (2.0), Ethernet (10/100)
Card Thickness	0,5 - 1,25 mm (20 - 50 mil)
Security Features	RFID ribbon, card feeder lock, custom watermarks (BMP)
Card Loading	Auto card feeder for 250 cards (0,76 mm thickness) Manual feed: single card
Card Types	PVC, ABS, PET, PET-G, PC 85,6 x 53,98 mm (ISO ID-1/CR-80 size)
Consumables	Ribbon YMCK (500 Images), Ribbon YMCKH (400 Images), Ribbon YMCKK (400 Images), Ribbon YMCKI (400 Images), Ribbon YMCKSI (350 Images), Transfer Film YMCK (500 Images) Ribbon K (500 Images), Transfer Film K (500 Images) Ribbon YMCK for PatchIM (500 Images), PatchIM PP (250 Images)
Cleaning Set	Cleaning Card Cleaning Roller
Physical Weight	22 kg
Physical Size	339 x 311 x 431 mm (W x D x H)
Noise	55 dB(A) while printing 40 dB(A) in standby
Power Voltage	Auto wide ranging, 100 - 240 V AC - 50/60 Hz
Environment	Printing: +15° to +30° C Temperature; 35 - 95% Humidity Storage: +5° C to +45° C Temperature; 35 - 95% Humidity
Driver	Windows 8/8.1/10/11 and Server 2012/2016/2019/2022
Optional Encoder	Encoder for MIFARE
Warranty	For more details please contact your local dealer

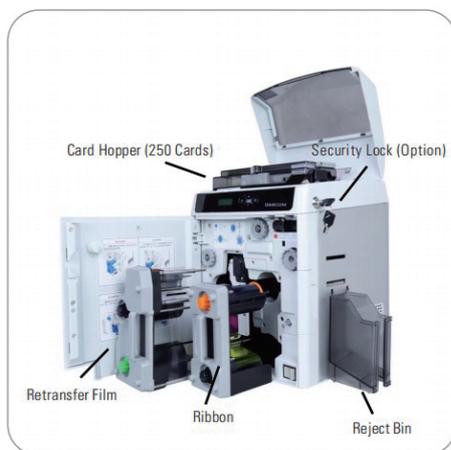

CHINA
Jiangmen Dascom Computer Peripherals Co., Ltd.
 No.399, Jinxing Road | Jianghai District
 Jiangmen City, Guangdong Province | China
 Tel:+86 0750-3868008 Fax: +86 0750-3868011
 info.cn@dascom.com | www.dascom.com

AMERICAS
DASCOM Americas.
 34 Lakeview Court | Verona
 Virginia, 24482 | USA
 Tel: +1(877)434-1377
 info.us@dascom.com | www.dascomamericas.com

APAC
DASCOM AP Pte. Ltd.
 2 Jurong East Street 21 | #05-42, IMM Building
 Singapore 609601
 Tel: +65 6760 8833 Fax: +65 67601066
 info.sg@dascom.com | www.dascom.com.sg

EMEA
DASCOM Europe GmbH.
 Heuweg 3
 89079 Ulm | GERMANY
 Tel: +49731 2075-0 Fax: +49 731 2075-100
 info.de@dascom.com | www.dascomeurope.de

All company and product names are trademark of their respective owner. Copyright © 2024 DASCOM. Specification are subject to change without notice.
 Subject to modification, of error or misprint.

DASCOM